

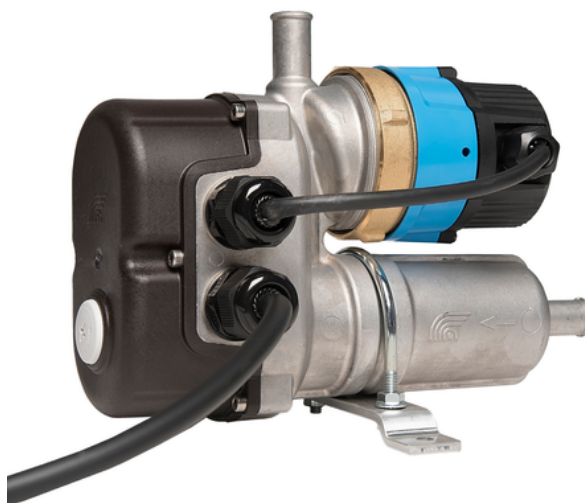
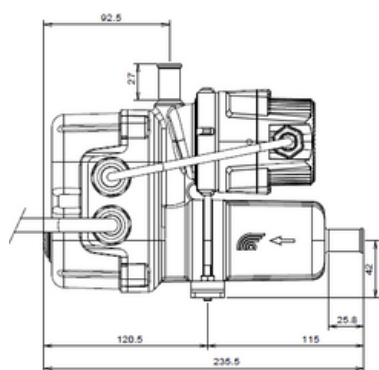
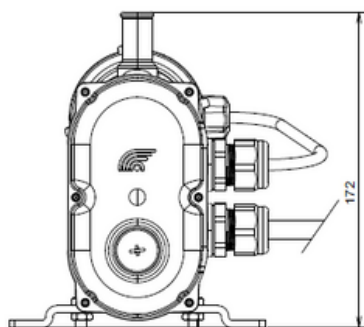


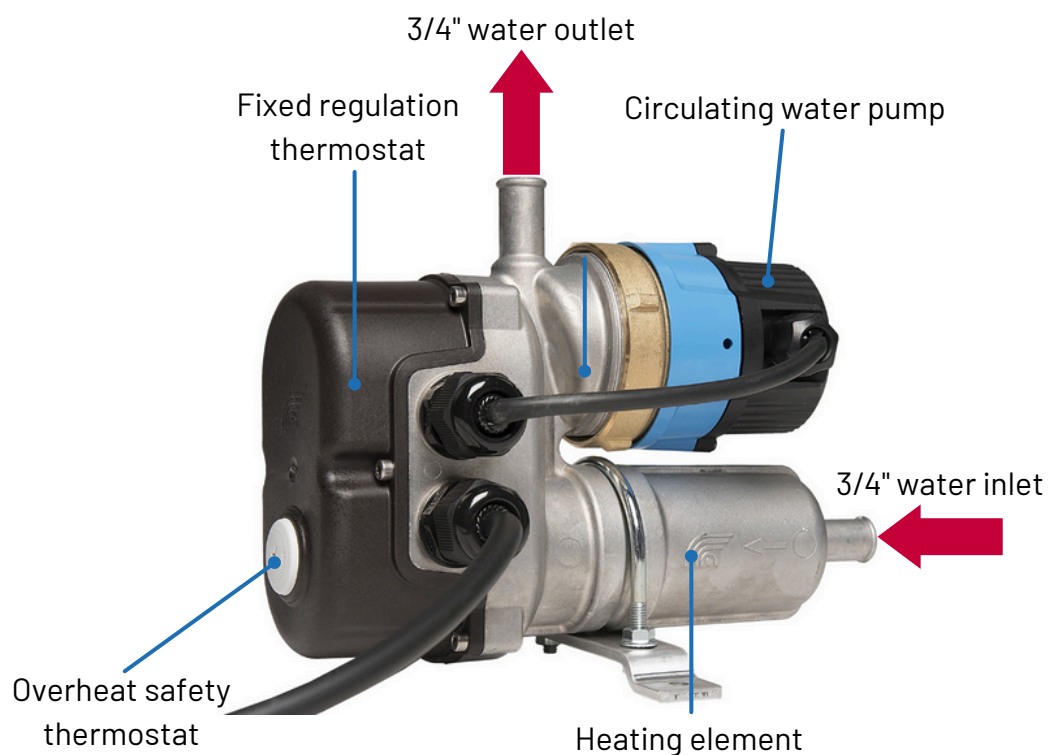


FlowStart

The FlowStart is an electric coolant heater for all types of water-cooled engines. It is universal, reliable, easy to install, and maintenance free. The heater can be put into service a few hours before starting the engine, in order to keep the engine permanently at the required temperature. This ensures an easy full power start whatever the ambient temperature and avoids cold start mechanical damage. This version is suited for all industrial applications, either stationary (generator sets) or mobile (vehicles, vans, trucks, heavy-duty vehicles).

Heating unit	Circulation pump
- Aluminum AS9U3 injected heating unit with impregnation treatment - PA66 protection covers 200 cm (6,6 ft) power cable - Inlet/Outlet: 5/8" (15 mm) hose barb water outlet and inlet	- Glandless circulation pump - Flow rate: 300L/h @ 1m height manometer (1,3 GPM @ 1,5 PSI) - Voltage: 120V to 230V - Frequency: 50 Hz and 60 Hz - IPX7 ingress protection level available
Water temperature control thermostat	Heating element
Fixed thermostat 34-40°C (93-104°F) or 35-50°C (95-122°F), rated 25A, 100.000 cycles	- Low watt density heating element (7,5W / cm², 48W / in² → 1,5kW) - Incoloy 800 protection sheet - Available powers: 500W, 1000W, 1500W, 2000W - Available voltages: 120V or 230V
Safety thermostat	
Security thermostat 110 °C with manual reset, rated 25A, 6.000 cycles	

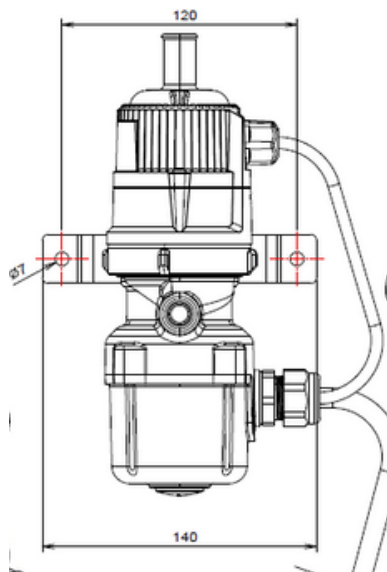

Installation diagram

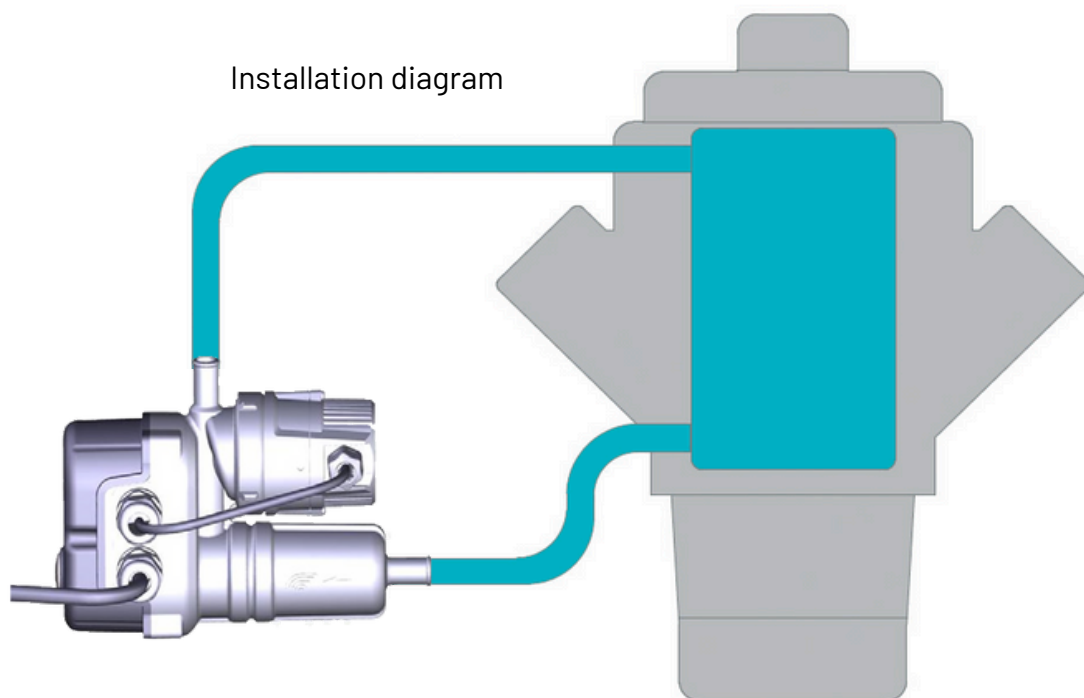

Your PowerHeat partner:

GenHeat
Unit 11, Shoby Lodge Farm
Loughborough Road, Shoby
Melton Mowbray, LE14 3PF

+44 (0)1664 668 599
sales@genheat.co.uk
www.genheat.co.uk

