






TopStart (bio) diesel & oil

The TopStart (bio) diesel & oil is an electrical preheating system with forced circulation made to warm up the (bio)diesel or oil of the engine.

It is universal, reliable, easy-to-install and maintenance-free. The system has the following benefits: fuel savings, decreasing pollution, reduced engine wear, no more difficult cold starts. The TopStart (bio) diesel & oil is very suitable for application on large equipment and large gensets.

Heating unit	Circulation pump
• Machined aluminum AlMgSi1 heating unit • PA66 protection covers • 1" Inlet and 3/4" outlet	• Electric vane pump: 750W • Voltage: 230V • Frequency: 50Hz or 60Hz • Flow: 25L/min at 6 bar
Water temperature control thermostat	Heating element
• Adjustable control thermostat with 25A cutout rating, 100,000 cycles • Available temperature interval: ▪ 0°C - 40°C (32°F - 104°F) ▪ 0°C - 80°C (32°F - 176°F)	• Incoloy 800® shielded immersion heater with very low specific power (2.5 W/cm² / 0.39 W/sq in) • Power: 1kW • Voltage: 230V
Safety thermostat	
• Safety thermostat with manual re-se option and 25A cutout rating, 6000 cycles (60°C / 140°F or 110°C / 230°F)	

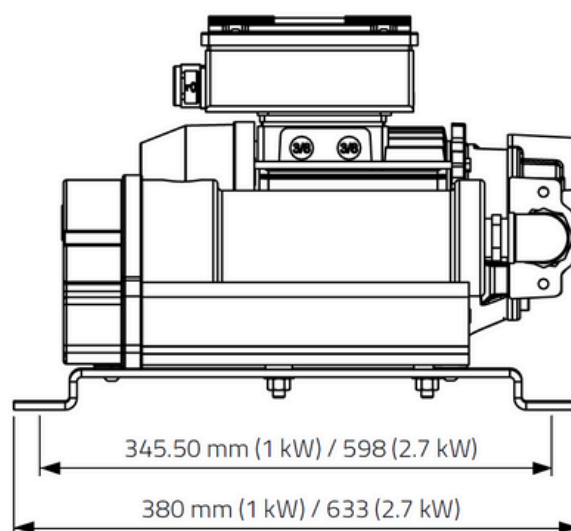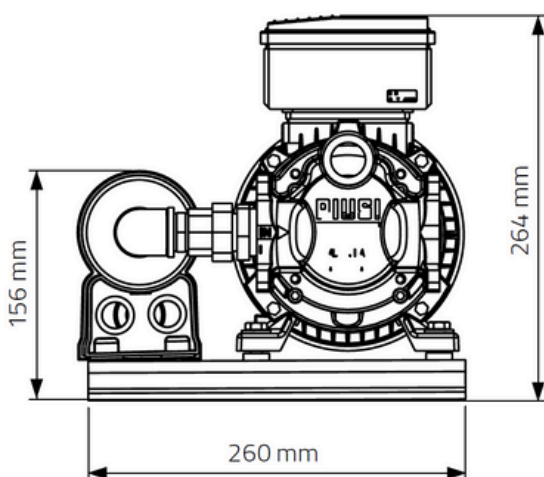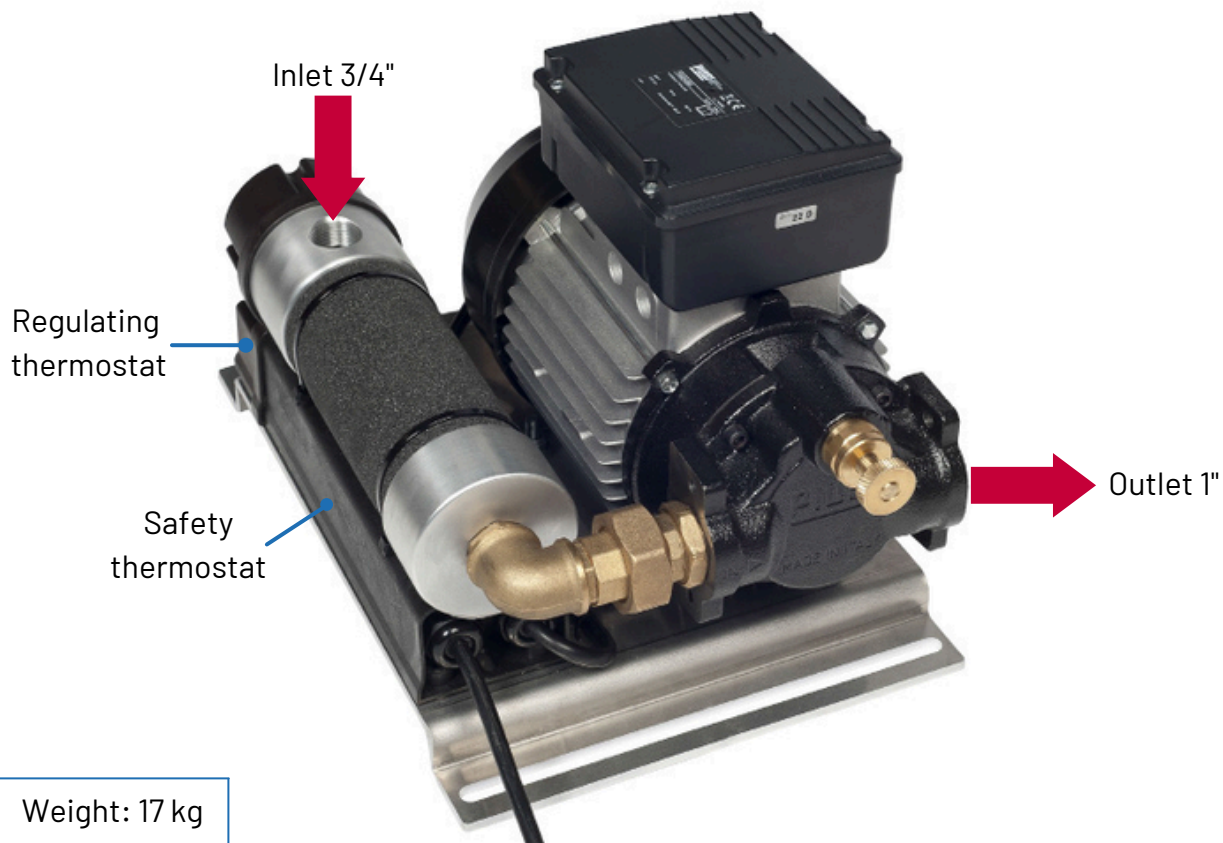

Your PowerHeat partner:

GenHeat

Unit 11
Shoby Lodge Farm
Loughborough Road, Shoby
Melton Mowbray
LE14 3PF

+44 (0)1664 668 599
sales@genheat.co.uk
www.genheat.co.uk

